



Telephone Call Action Wizard

This tutorial provides you the information needed to setup a telephone call action via the notification wizards.

To get to the starting point of this tutorial:

- Log in as administrator
- Click the “Notifications” tab

1. Adding a notification

a) First click on the “notification wizard”

System Name - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://10.1.1.205/wiznotify.php

Click notification tab

Location: System Location

Summary Map Picture Log Sensors Notification Settings Applications Help

Current System Time: 17/9/07 19:13:36

Notification Menu

Begin Notification Wizard

Action

Sensor Action Link

Options

View Notification Log

Notification Analyzer

Help

This page displays all Actions currently created. From here you may create, duplicate, edit and remove Actions. Select your desired Action(s) before making a choice.

You may also select an Action and test its functionality using the Test Action button

Click here to begin setting up a notification

First Page << Page 1 of 2 >>

Action Type	Action Name
SNMP Trap	SNMP Trap 1
	SNMP Trap 2
	SNMP Trap 3
	SNMP Trap 4
	SNMP Trap 5
	SNMP Trap 6
Email	Email 1
	Email 2
	Email 3
Alarm Sound	Alarm Sound 1
	Alarm Sound 2
Speech	Speech 1
	Speech 2
	Speech 3
Picture Log	Picture Log 1

Click To Toggle Selection


Create Duplicate Edit Remove

Test Action


Internet

7:15 PM

b) You will now have the notification wizard page displayed, like below.

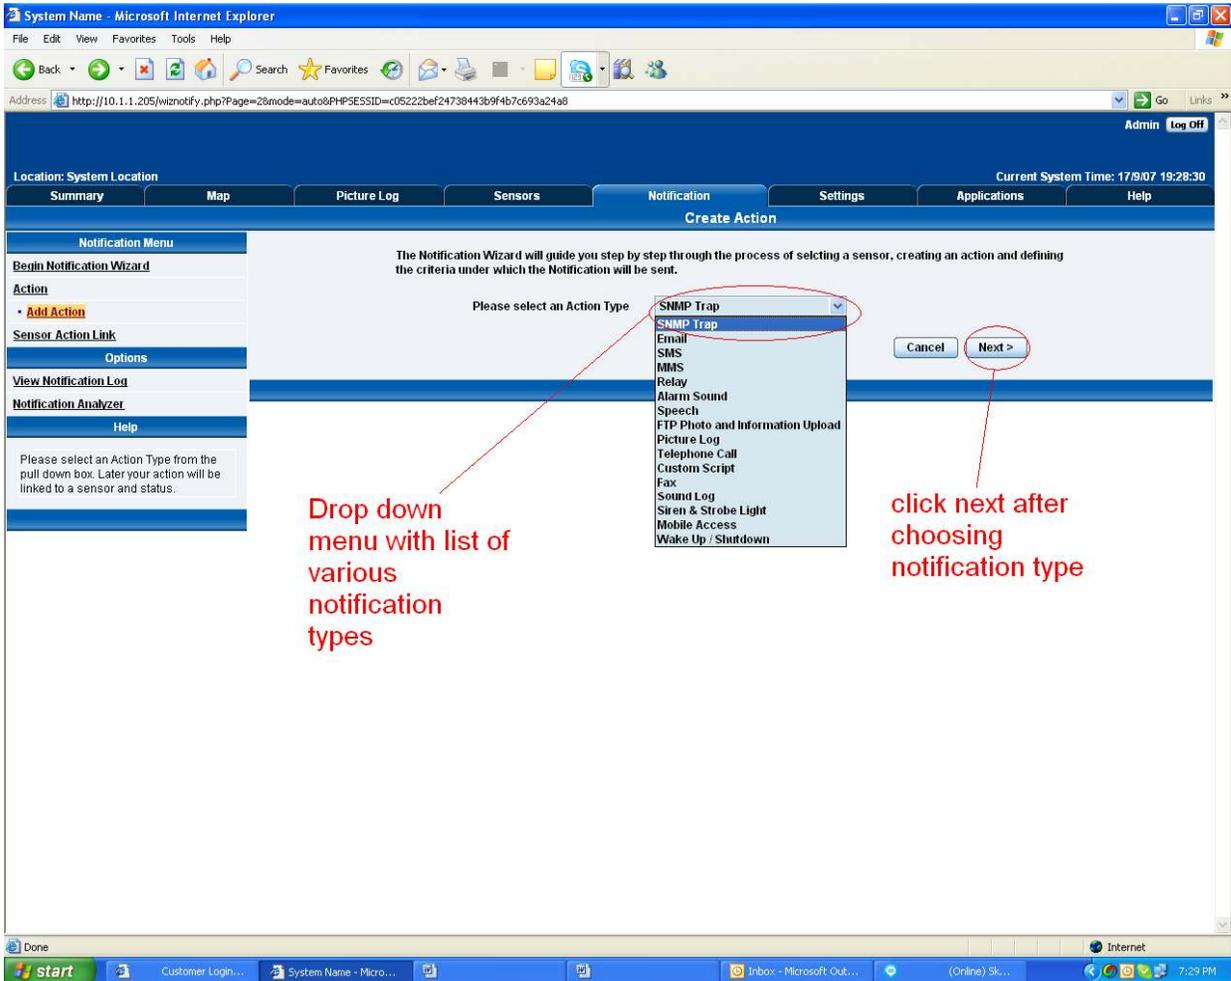


c) Select telephone call from the notification type options.

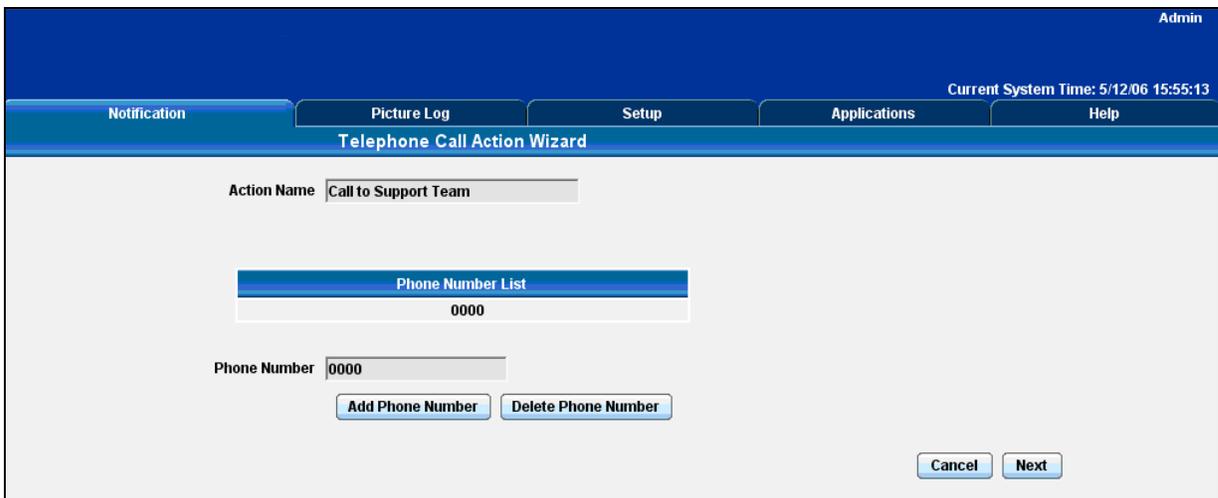

Please choose a name for your Telephone Call Action. Descriptive action names increase the simplicity of the system.

Enter your destination phone number and Click **Add Phone Number**. You may include multiple phone numbers.

Click **Next** to continue

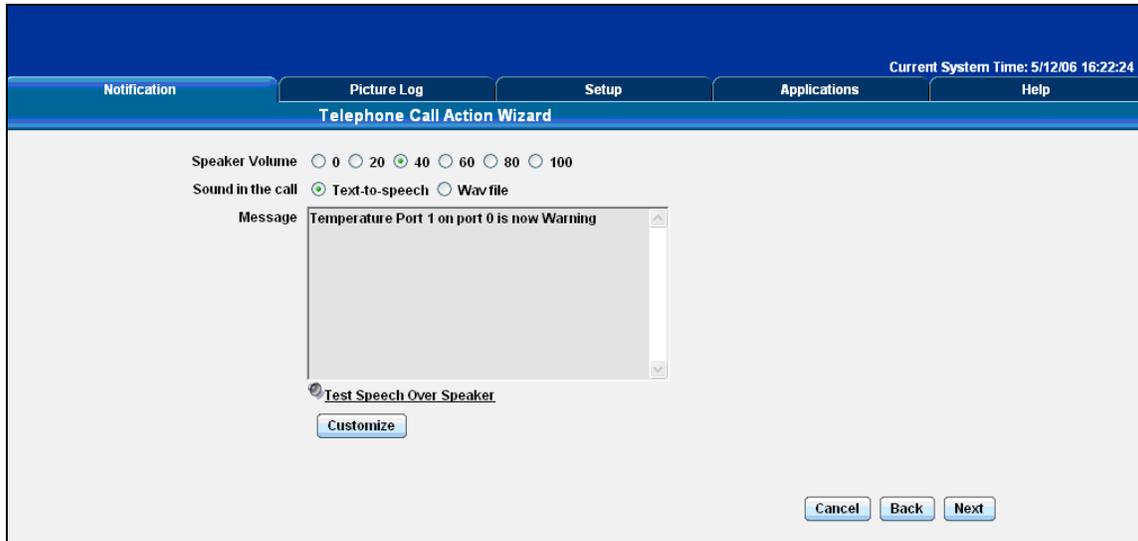

The screenshot shows the 'Telephone Call Action Wizard' window. At the top right, it displays 'Current System Time: 5/12/06 16:22:24'. The window has a navigation bar with tabs for 'Notification', 'Picture Log', 'Setup', 'Applications', and 'Help'. The main area contains the following settings:

- Speaker Volume: Radio buttons for 0, 20, 40 (selected), 60, 80, 100.
- Sound in the call: Radio buttons for Text-to-speech (selected) and Wav file.
- Message: A text box containing 'Temperature Port 1 on port 0 is now Warning'.
- A checkbox for 'Test Speech Over Speaker' which is checked.
- A 'Customize' button below the checkbox.
- Navigation buttons: 'Cancel', 'Back', and 'Next' at the bottom right.

Select the volume for your phone call.

You may select to either use the Text to Speech module for your call or a Wav file.


If you choose to use the Text to Speech module a preview of the message that will be read is displayed. The message read will include the details relevant to your sensor.

Click Customize to change the format of this message. The items in your message with a dollar sign and parentheses e.g. \$[TIME] represents the data to be imported into your message at the time of reading. Please click the Macro Description button for a full list.

Pressing the Test Speech over Speaker button, will cause the speaker in the securityHawk to say the message aloud via the internal speaker.


If you chose to use a Wav file for your call you can choose a file from the drop down list or add your own. Add your own sound by clicking the Add Your Own Sound button, locating the file on your computer and clicking Add Sound File. This will add your sound to the drop down box.

Click **Next** to continue

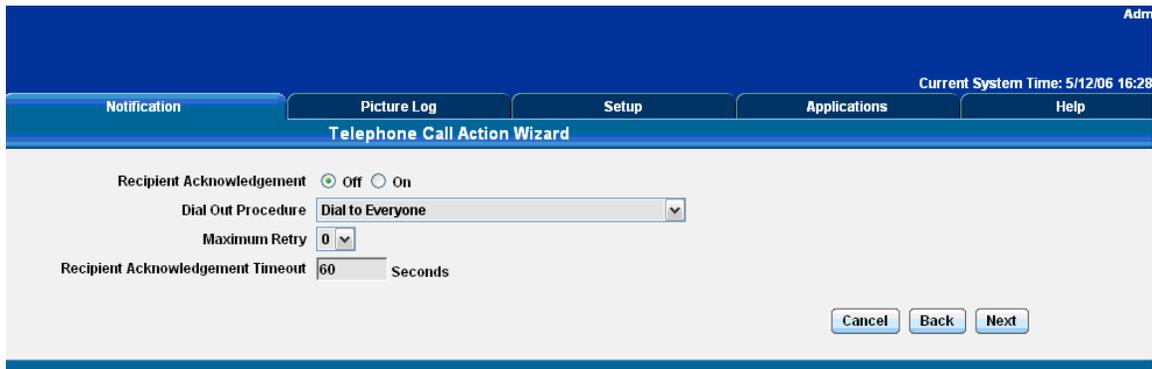

If Recipient Acknowledgement is selected the user will be requested to dial 1 on their phone when prompted in the call to confirm their acknowledgement. Select the dial out procedure, maximum number of retries and acknowledgement timeout.

Click **Next** to continue

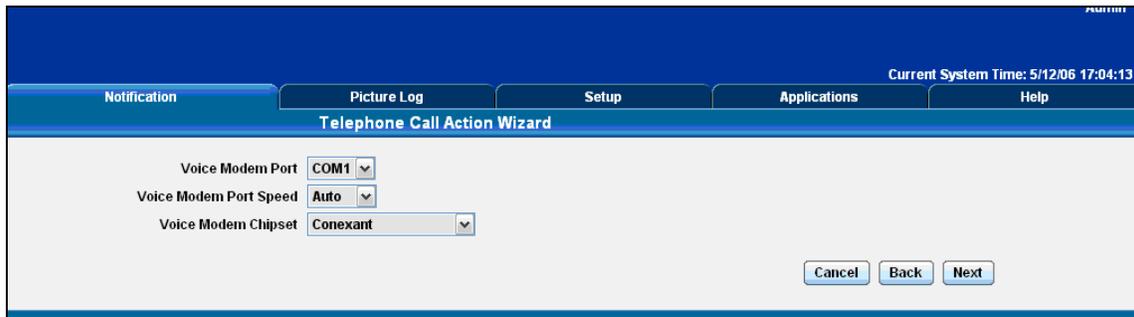

Current System Time: 5/12/06 17:04:13

Notification | Picture Log | **Setup** | Applications | Help

Telephone Call Action Wizard

Voice Modem Port: COM1
 Voice Modem Port Speed: Auto
 Voice Modem Chipset: Conexant


Cancel Back Next

Select the connection method between your Voice Modem and computer.

If you do not know your Port Speed leave this as Auto.

Select your modem chipset

Click **Next** to continue

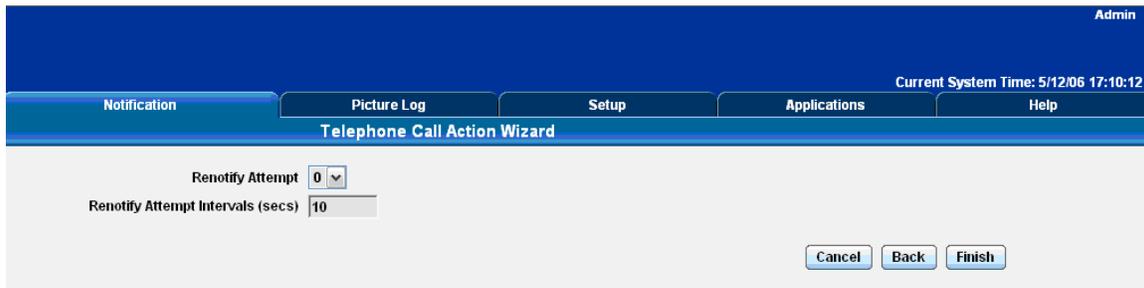

Admin

Current System Time: 5/12/06 17:10:12

Notification | Picture Log | **Setup** | Applications | Help

Telephone Call Action Wizard

Renotify Attempt: 0
 Renotify Attempt Intervals (secs): 10

Cancel Back Finish

Define the number of re-notification attempts and the interval between each.

Click **Finish** to save your action